


Держатель аккумуляторов серии SBP



Batteries holder module


- 12 or 24 Vdc selectable output voltage
- Suitable for sealed lead rechargeable batteries
- Suitable for CSBC, CS-UPS, CSC75
- Suitable for DIN rail installation



NOTES

The depth dimension includes the terminal blocks and the DIN rail clamp.
(1) Into XCSBP30Y are necessary two batteries 8911012

BLOCK DIAGRAM

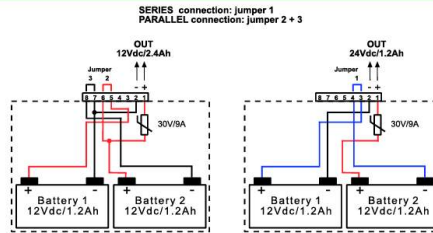

VERSIONS

Batteries holder module (empty)
Battery (1)

CSBP30Y
BAT12V1,2AH

Cod. XCSBP30Y
Cod. 8911012

APPLICATIONS

GENERAL TECHNICAL DATA

Batteries type	2 sealed batteries 12Vdc 1.2 Ah	
Internal protection fuse	15 A	
Setup type	parallel	series
Output voltage	12 Vdc 2.4 Ah	24 Vdc 1.2 Ah
Charging current max.	0.6 A	0.3 A
Discharging current max.	5 A	3 A
Operating temperature range	-10...+50°C	
EMC Standards	IEC 664-1, DIN VDE	
Overvoltage category/Pollution degree	II / 2	
Protection degree	IP 20 IEC 529, EN60529	
Connection terminal	2.5 mm ² pluggable screw type	
Housing material	aluminium	
Approx. weight	1.2 kg (42.36 oz)	
Mounting information	vertical on rail, adjacent	

MOUNTING ACCESSORIES

Mounting rail type according to IEC60715/TH35-7.5
Mounting rail type according to IEC60715/G32

PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB



Example 1:
XCS120C + XCSBP30Y



Example 2:
XCSF120C + XCSUPS1 + XCSBP30Y